

A


B

C


D

E

F

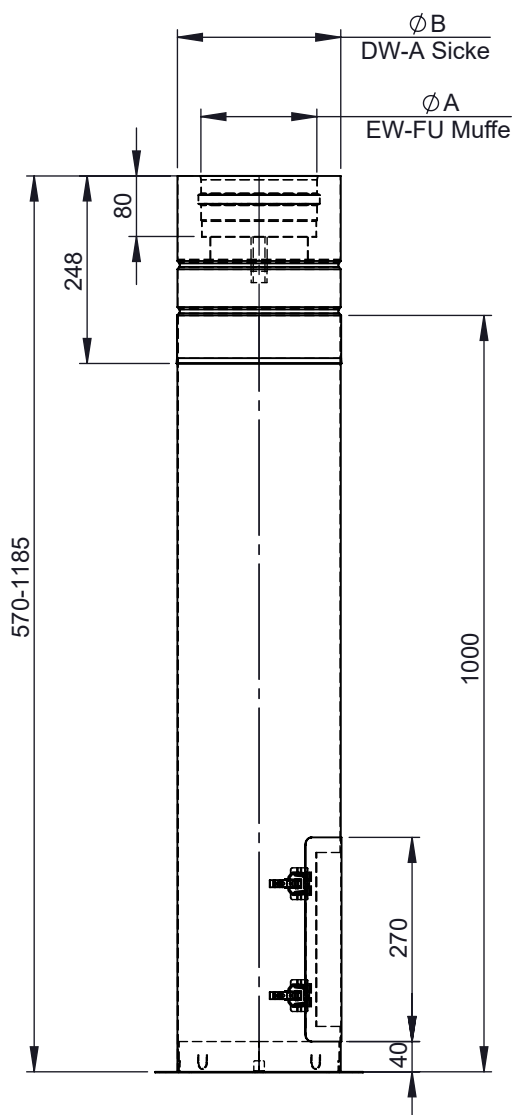Ausführungsvarianten  
für Muffe Innenrohr

M 1:15 (Ø150)

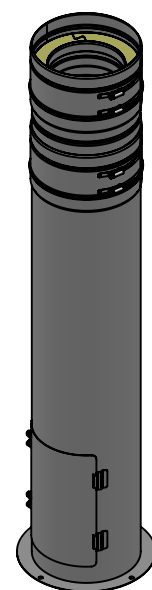

Ø	80	100	110	115	120	125	130	140	150	160	180	200	225	250	300	350	400	450	500	550	600
<b>A</b>	80	100	110	115	120	125	130	140	150	160	180	200	225	250	300	350	400	450	500	550	600
<b>B</b>	145	165	175	180	185	190	195	205	215	225	245	265	290	315	365	415	465	515	565	615	665
<b>C</b>	185	205	215	220	225	230	235	245	255	265	285	305	330	355	405	455	505	555	605	655	705
<b>D</b>	205	225	235	240	245	250	255	265	275	285	305	325	350	375	425	475	525	575	625	675	725
<b>kg</b>	5,9	6,9	7,2	7,5	7,7	7,9	8,2	8,6	9,1	9,6	10,5	11,9	12,8	14,1	16,8	19,6	22,6	25,7	28,9	32,3	35,8

Material <b>1.4404 / 1.4301 Hochglanz</b>	DIN ISO 13920 Tolerances B		 scale 1:10 format A4 sheet 1 of 1 
	Revisionsnummer <b>A1</b>	mm / kg	
	Datum	Name	
	drawn by 03.02.2021	LBU	
	checked by		
	approved by		
modified by			
Artikelbezeichnung <b>Stützfuß mit Türe verstellbar von 610 mm bis 1190 mm</b>		Artikelnummer <b>DWP-Ø-013</b>	